



1 Appearance

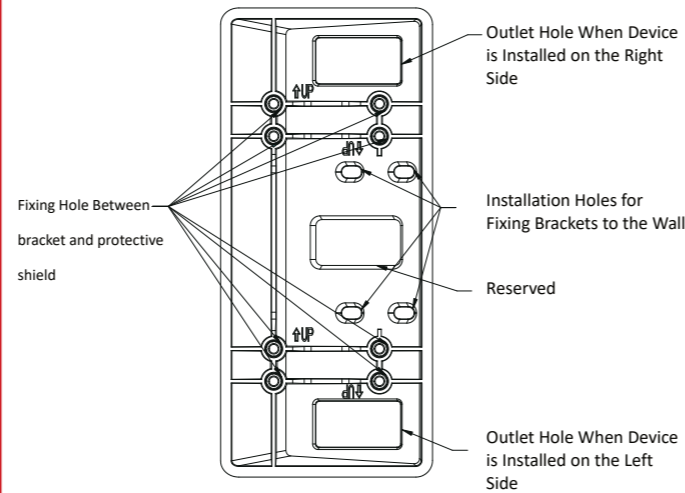

When facing the door and installing the device on the left, the holes in the bracket and protective shield cover should be aligned with the corresponding four installation holes.

When facing the door and installing the device on the right, the holes in the bracket and protective shield cover should be aligned with the corresponding four installation holes.

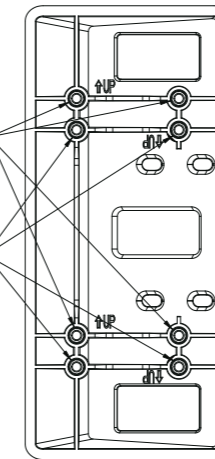

2 Specifications


Product	Wall-Mounted Bracket
Product Model	DS-KABV6113-A
Dimension (W × H × D)	133.1 mm x 60.1 mm x 35.1 mm
Applicable Products	DS-KV6113-PE1(C), DS-KV6113-WPE1(C), DS-KV6103-PE1(C)
Protective Shield Model	DS-KABV6113-RS
Mounting Plate	In KV6103/6113 Series Door Station Product Package
Working Temperature	-30°C to 60°C
Working Humidity	10% to 90%

3 Installation


Before You Start

- Make sure the device in the package is in good condition and all the assembly parts are included.
- Check the product specification for the installation environment.

Installation(Take Installing on the left side for example)

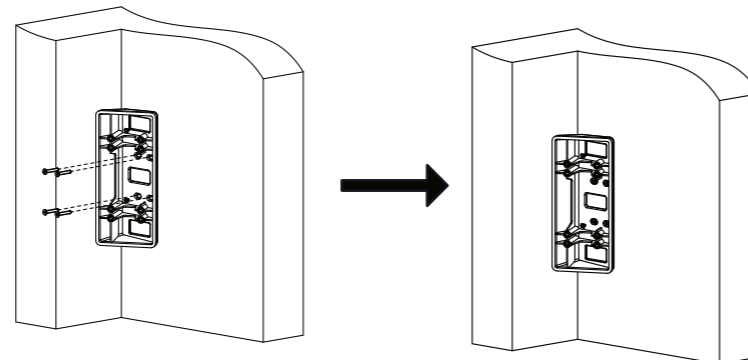

- Align the bracket with the wall. Secure the mounting bracket on the wall with 4 SC-KA3X20-NI-JMF screws.

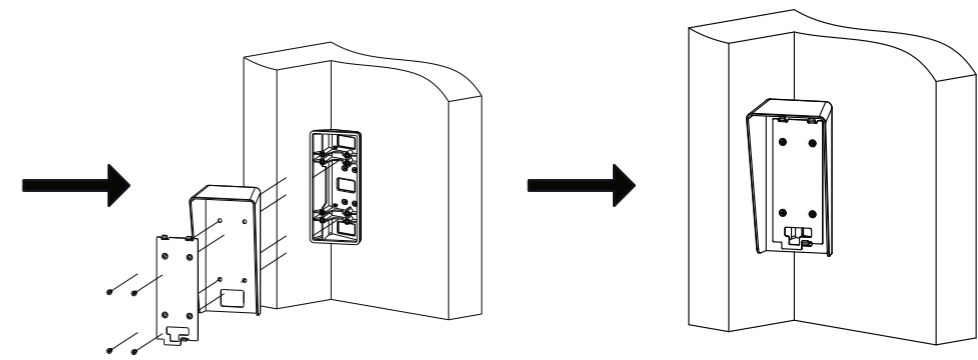

- Align the protective shield(DS-KABV6113-RS) and the applied mounting plate with the bracket. Secure the protective shield and the mounting plate on the bracket with 4 SC-KM3X8-BNI screws.

Installing on the right side is the same as installing on the left side, you can refer to the figure on the left.

